



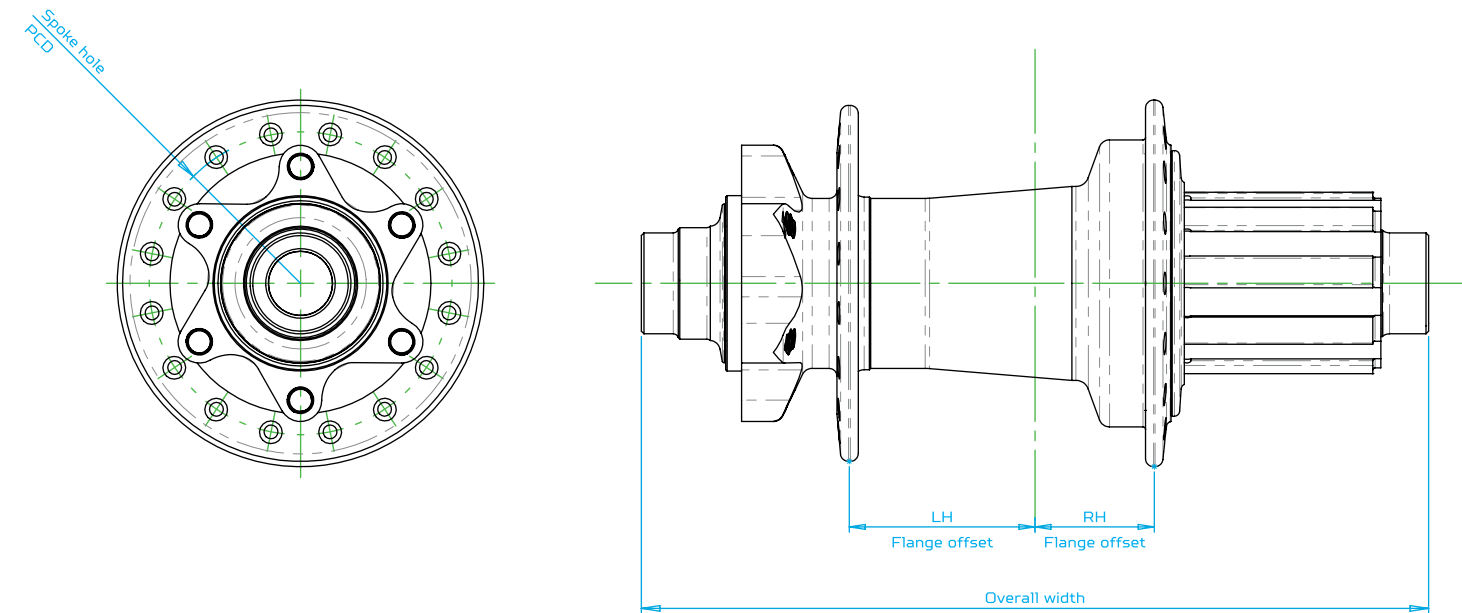

SPOKE HOLE PCD + OFFSETS
J-BEND

PRO5

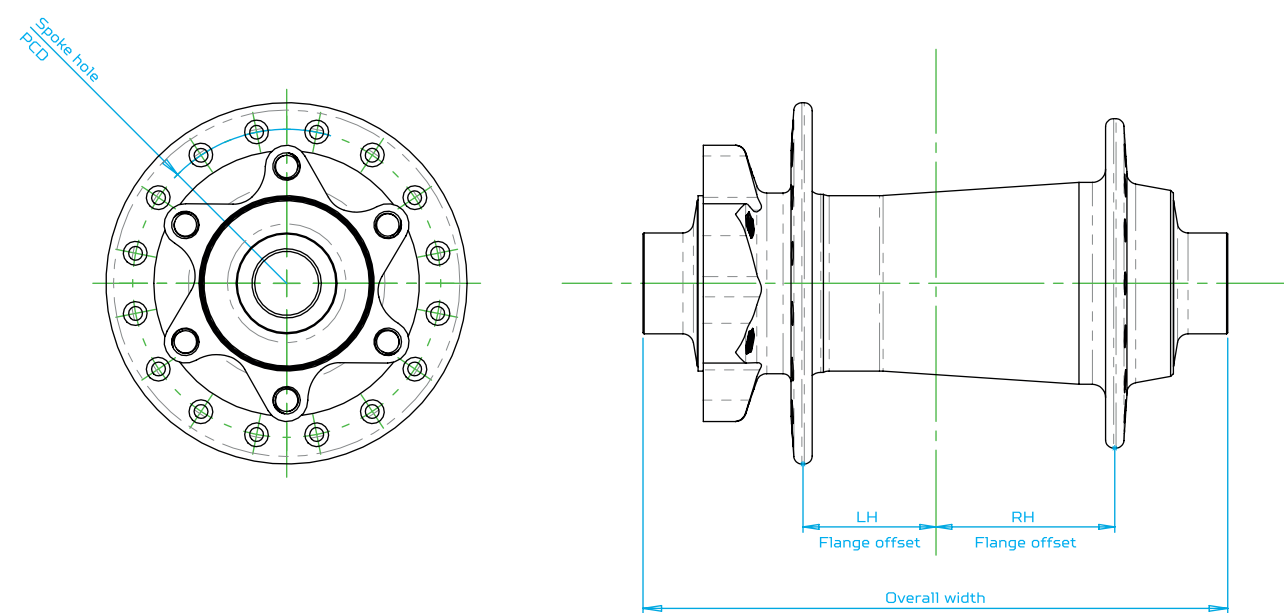

FRONT	Hub Model	Spoke Hole PCD		Flange Offset		Spoke Hole DIA.	
		LHS (NDS)	RHS (DS)	LHS (NDS)	RHS (DS)	LHS (NDS)	RHS (DS)
	PRO5 Front 100 6 Bolt	58	52	20	34	2.6	2.6
	PRO5 Front 110 6 Bolt	58	52	25	34	2.6	2.6
	PRO5 Front 100 CL	43	43	22	33	2.6	2.6
	PRO5 Front 110 CL	43	43	27	35.6	2.6	2.6

REAR	Hub Model	Spoke Hole PCD		Flange Offset		Spoke Hole DIA.	
		LHS (NDS)	RHS (DS)	LHS (NDS)	RHS (DS)	LHS (NDS)	RHS (DS)
	PRO5 Rear 135 6 Bolt*	57	59	32	19.6	2.6	2.6
	PRO5 Rear 148 6 Bolt**	57	59	35	22.6	2.6	2.6
	PRO5 Rear 150 6 Bolt	57	59	28	26.8	2.6	2.6
	PRO5 Rear 148 DH 6 Bolt	60	64	28.5	28.5	2.6	2.6
	PRO5 Rear 150 DH 6 Bolt	60	64	33	33	2.6	2.6
	PRO5 Rear 157 SB 6 Bolt	57	59	39.6	27	2.6	2.6
	PRO5 Rear SS T 6 Bolt	57	59	32	30.6	2.6	2.6
	PRO5 Rear 148 SS T 6 Bolt	57	59	35	33.6	2.6	2.6
	PRO5 Rear 135 CL	51	59	32	19.6	2.6	2.6
	PRO5 Rear 148 CL	51	59	35	22.6	2.6	2.6

*Use for 142 x 12 Hubs **Use for 141 QR Hubs